Tilt Adjustable Ground Light

Straight to Mains, TRIAC mains dimmable

Features

IK Rating	IK08
IP Rating	IP67
CSP Switchable	Single CCT
Tiltable	25°
Walk Over / Drive Over	Drive over (15mph maximum)
LED Lifetime	L70 50,000h
CRI	CRI>80
SDCM	SDCM3

Installation information

Cut Out Size	119
UK Bathroom Zone	2
Inrush Current	GLTM_11: 0.5A 0.4ms, GLTM_14: 0.6A 0.4ms, GLTM_16: 0.45A 0.5ms, GLTM_19: 0.55A 0.5ms,GLTM_22: 0.55A 0.5ms
Construction Material	Anodised aluminium body, 316 SS bezel
Weight	GLTM_11: 0.99kg, GLTM_14: 1.56kg, GLTM_16: 2.03kg, GLTM_19: 3.26kg ,GLTM_22: 3.98kg
Ambient Temperature Range	-25°C - 40°C
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	W	Colour	Beam	lm	llm/W
GLTMS119T30	Stainless steel 316	119mm cut-out	IK08	6W	3000K	34°	450	75
GLTMS147T30	Stainless steel 316	147mm cut-out	IK08	12W	3000K	34°	1200	100
GLTMF147T30	Stainless steel 316	147mm cut-out	IK08	12W	3000K	60°	1200	100
GLTMS165T30	Stainless steel 316	165mm cut-out	IK10	18W	3000K	34°	1600	89
GLTMF165T30	Stainless steel 316	165mm cut-out	IK10	18W	3000K	60°	1600	89
GLTMS193T30	Stainless steel 316	193mm cut-out	IK10	23W	3000K	34°	2300	100
GLTMS223T30	Stainless steel 316	223mm cut-out	IK10	30W	3000K	34°	3300	100

Wiring information

Cable / Flying Lead	Pre-wired 1.0M H05RN-F, 3x1.0mm2
Type of Wiring Required	Parallel

Accessories

DM298FP	Faceplate rotary mains dimmer	Sold Separately
DM298GRID	Grid rotary mains dimmer	Sold Separately
JB5	Gel filled waterproof connector	Sold Separately

collingwood

01604 495 151
collingwoodlighting.com

collingwoodled
/collingwoodlighting
collingwoodlighting

Guarantee

5 years

Features & benefits

IP67 for complete protection against ingress of dust & water

IK08 (GLTM_11/14) IK10 (GLTM_16/19/22)

Suitable for coastal applications

Tilt angle of luminaire is adjustable, just turn knob to tilt the light distribution up to 25 degrees

Static loading capacity is 2000kg

Pre-wired with 1 meter of cable to aid the installer

DALI-2 dimmable and RGBW options also available

Light source energy efficiency: A to G — E
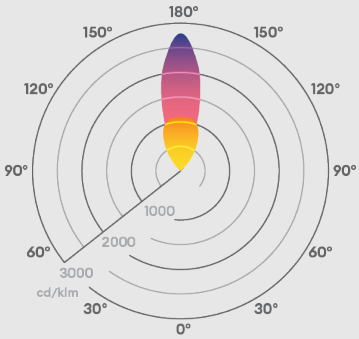
Beam angle: 34°